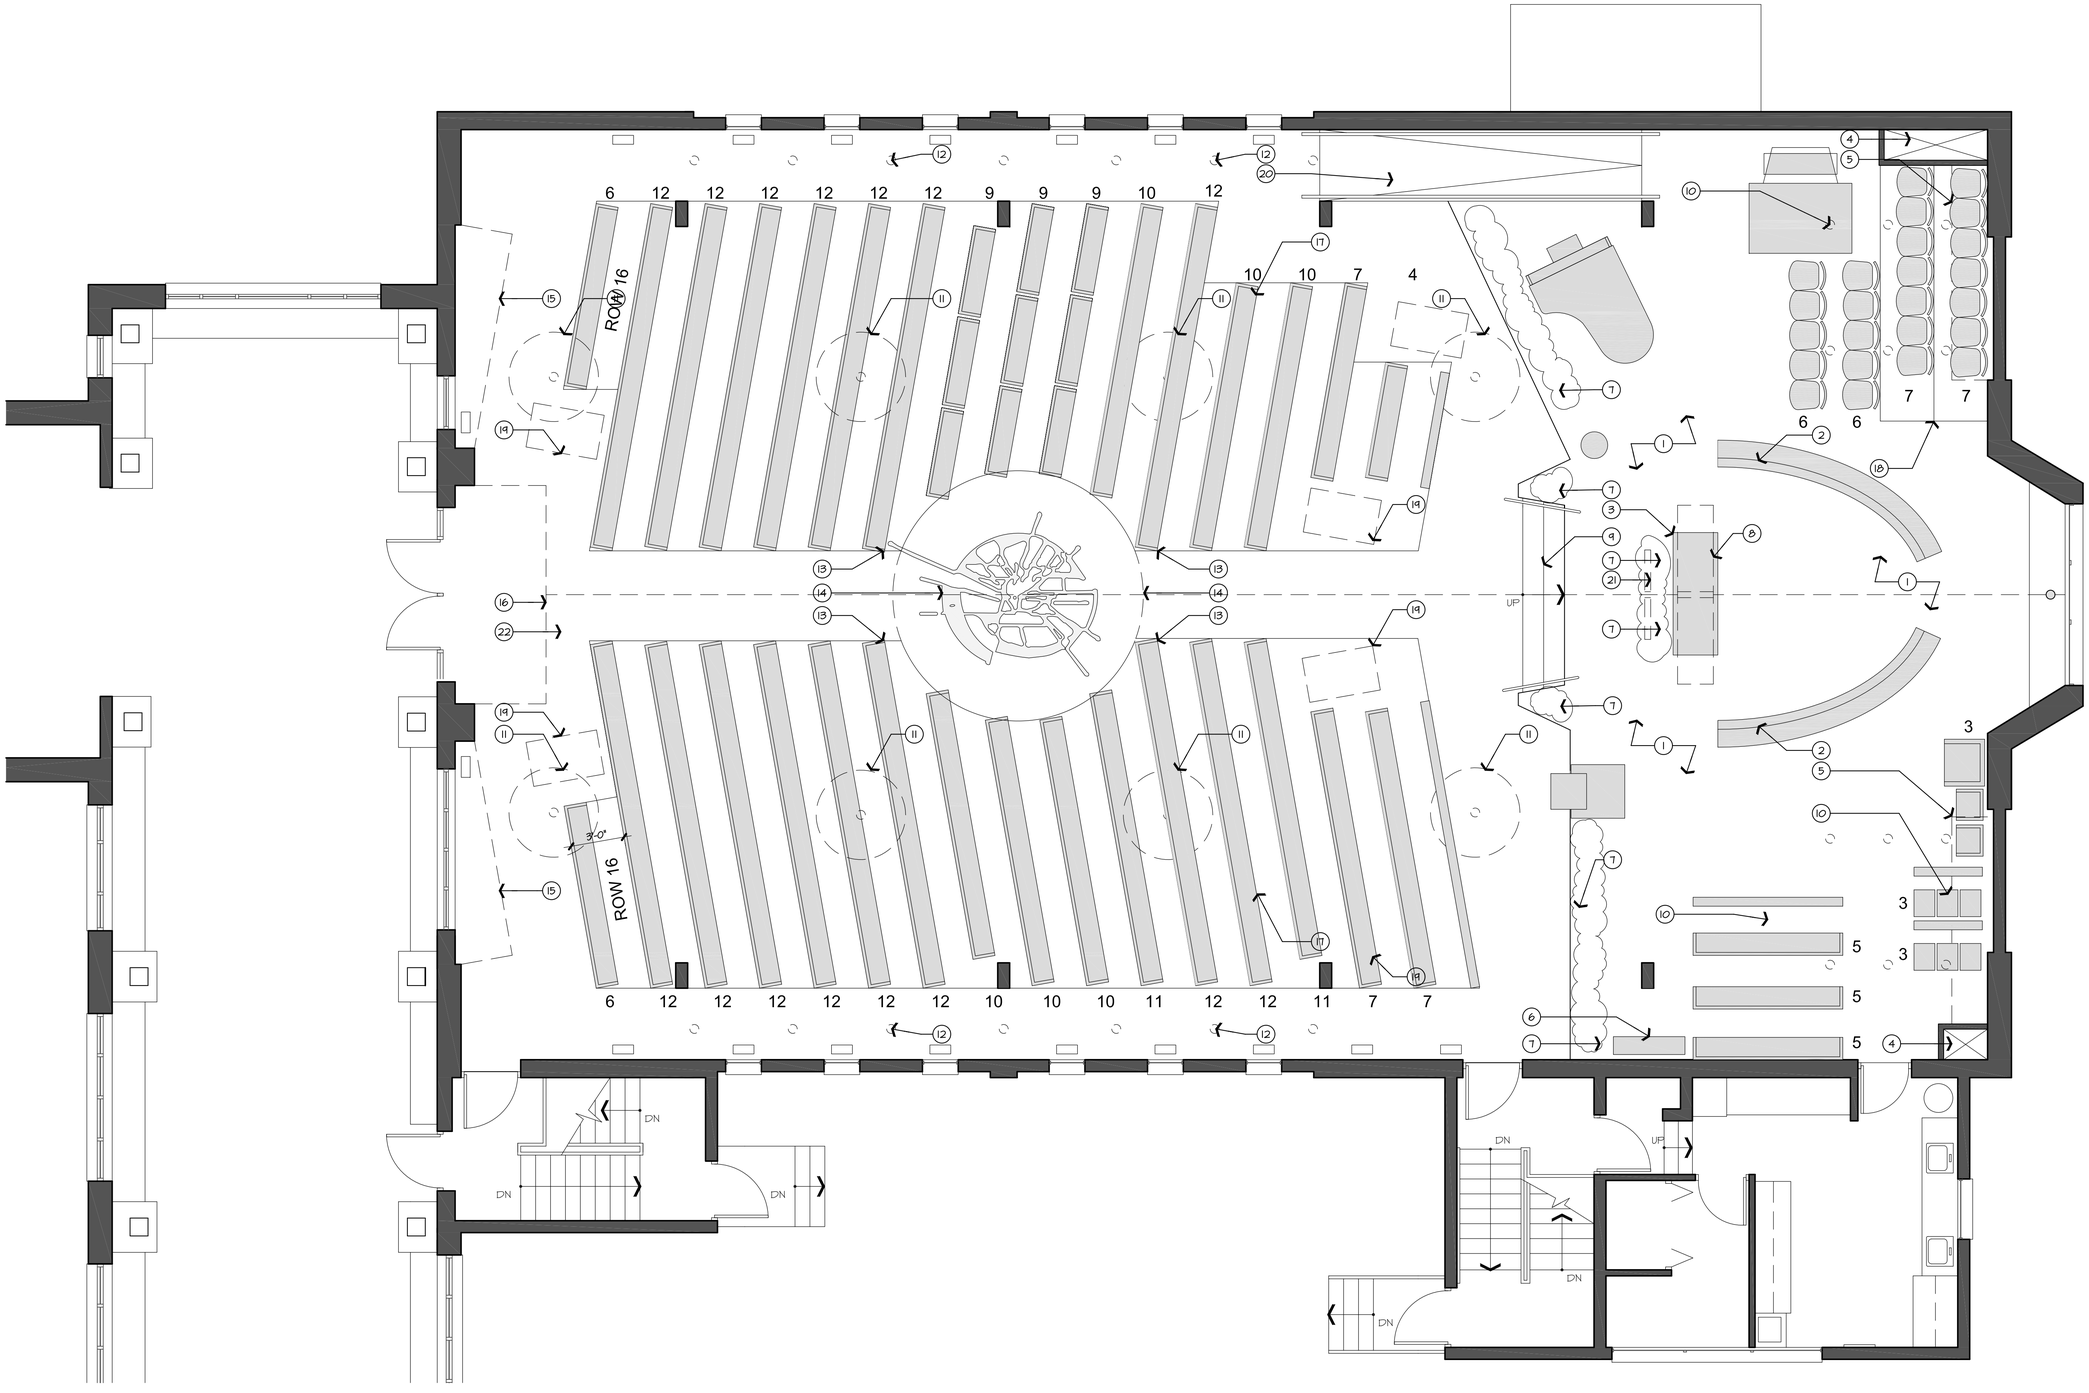

NOTES

1. CHANCEL OAK FLOORING
2. REMOVABLE COMMUNION RAIL, MODIFY CUSHIONS
3. EXISTING ALTAR
4. RELOCATED HVAC RETURN GRILLES
5. SPEAKER ENCLOSURES ABOVE WITH INTEGRAL LIGHTING
6. CREDENCE TABLE
7. FLOWERS/ SEASONAL DECORATIONS
8. NEW RIDGE SKYLIGHT
9. NEW WIDE OAK STEPS & RAILINGS
10. CYLINDRICAL PENDANT LIGHTS, ON DIMMERS
11. PENDANT, 5 FEET DIAMETER HOOP WITH 6 DIMMABLE FIXTURES 14 FEET AFF
12. ACCENT LIGHTS FOR EACH STATION OF THE CROSS
13. EXISTING PEWS AT 10 DEGREES
14. PARISH SYMBOL W/ 5' DIAMETER HALO LIGHT RING ABOVE.
15. ACOUSTICAL PANELS ABOVE AT 10 DEGREES
16. ORGAN SPEAKER/ PIPES.
17. NEW 5' PEWS FOR FLEXIBILITY
18. CHOIR RISERS AND CHAIRS
19. HANDICAPPED SEATING
20. NEW RAMP
21. SUSPENDED CROSS
22. REPLACE CARPET

SEATING SUMMARY

NAVE SEATING:	
PEWS	269
5' PEWS	54
HANDICAPPED	5
TOTAL NAVE SEATING	**328**
CHANCEL SEATING:	
CHOIR	26
VERGERS	6
ACOLYTES	15
CLERGY	3
TOTAL CHANCEL SEATING	**50**
TOTAL SEATING	**380**

0' 4' 8' 20' 70' 140'

Church of the Holy Comforter
Vienna, VA

ALTERNATIVE 2
FLOOR PLAN

8 DEC 2011

Kerns Group Architects, P.C.
Arlington, Virginia

Copyright 2011 Kerns Group Architects, P.C., All Rights Reserved